


King Drill (4D)

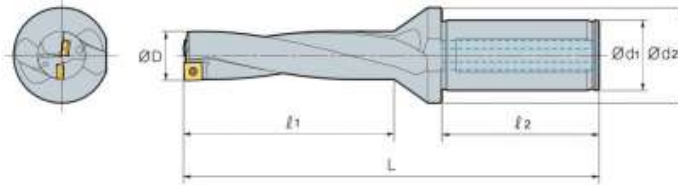


(mm)

Designation		ØD	Ød ₁	Ød ₂	l ₁	l ₂	L	Insert	Screw 	Wrench 
K4D	12020-04	12.0	20	25	51	50	115	SP□T040204-□□ XO□T040204-□□	FTNA0204	TW06P
	12520-04	12.5	20	25	51	50	115			
	13020-04	13.0	20	25	55	50	119			
	13520-04	13.5	20	25	55	50	119			
	14020-05	14.0	20	25	59	50	124	SP□T050204-□□ XO□T050204-□□	FTNA0204	TW06P
	14520-05	14.5	20	25	59	50	124			
	15020-05	15.0	20	25	63	50	129			
	15520-05	15.5	20	25	63	50	129			
	16020-05	16.0	20	25	67	50	133	SP□T060205-□□ XO□T060204-□□	FTKA02206S	TW07P
	16525-06	16.5	25	34	67	56	139			
	17025-06	17.0	25	34	71	56	143			
	17525-06	17.5	25	34	71	56	143			
	18025-06	18.0	25	34	75	56	148			
	18525-06	18.5	25	34	75	56	148			
	19025-06	19.0	25	34	79	56	152	SP□T07T208-□□ XO□T07T205-□□	FTKA02565	TW07S
	19525-06	19.5	25	34	79	56	152			
	20025-07	20.0	25	34	83	56	158			
	20525-07	20.5	25	34	83	56	158			
	21025-07	21.0	25	34	87	56	162			
	21525-07	21.5	25	34	87	56	162			
	22025-07	22.0	25	34	91	56	166			
	22525-07	22.5	25	34	91	56	166			
	23025-07	23.0	25	34	95	56	172	SP□T090308-□□ XO□T090305-□□	FTKA0307	TW09S
	23525-07	23.5	25	34	95	56	172			
	24032-09	24.0	32	44	99	60	181			
	24532-09	24.5	32	44	99	60	181			
	25032-09	25.0	32	44	103	60	185			
	25532-09	25.5	32	44	103	60	185			
	26032-09	26.0	32	44	107	60	189			
	26532-09	26.5	32	44	107	60	189			
	27032-09	27.0	32	44	111	60	194			
	27532-09	27.5	32	44	111	60	194			
	28032-09	28.0	32	44	115	60	199			
	28532-09	28.5	32	44	115	60	199			
	29032-09	29.0	32	44	119	60	203	SP□T11T308-□□ XO□T11T306-□□	FTKA03508	TW15S
	29532-09	29.5	32	44	119	60	203			
	30032-11	30.0	32	44	123	60	210			
	30532-11	30.5	32	44	123	60	210			
	31032-11	31.0	32	44	127	60	214			
	31532-11	31.5	32	44	127	60	214			
	32032-11	32.0	32	44	131	60	218			
	32532-11	32.5	32	44	131	60	218			
	33032-11	33.0	32	44	135	60	223			
	33532-11	33.5	32	44	135	60	223			
	34032-11	34.0	32	44	139	60	227			
	34532-11	34.5	32	44	139	60	227			
	35032-11	35.0	32	44	143	60	231			
	35532-11	35.5	32	44	143	60	231			

Applicable inserts G04~05

King Drill (4D)

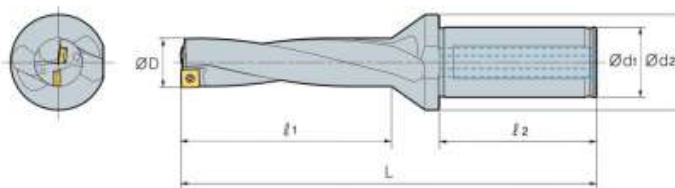


(mm)

Designation	OD	Od ₁	Od ₂	l ₁	l ₂	L	Insert	Screw	Wrench
K4D									
36040-13	36.0	40	48	148	70	248	SP□T130410-□□ XO□T130406-□□	FTKA0410	TW15S
36540-13	36.5	40	48	148	70	248			
37040-13	37.0	40	48	152	70	252			
37540-13	37.5	40	48	152	70	252			
38040-13	38.0	40	48	156	70	257			
38540-13	38.5	40	48	156	70	257			
39040-13	39.0	40	48	160	70	261			
39540-13	39.5	40	48	160	70	261			
40040-13	40.0	40	48	164	70	266			
40540-13	40.5	40	48	164	70	266			
41040-13	41.0	40	48	168	70	270			
41540-13	41.5	40	48	168	70	270			
42040-13	42.0	40	48	172	70	275			
42540-13	42.5	40	48	172	70	275			
43040-15	43.0	40	58	177	70	282	SP□T15M510-□□ XO□T15M508-□□	FTNC04511	TW20S
43540-15	43.5	40	58	177	70	282			
44040-15	44.0	40	58	181	70	286			
44540-15	44.5	40	58	181	70	286			
45040-15	45.0	40	58	185	70	291			
45540-15	45.5	40	58	185	70	291			
46040-15	46.0	40	58	189	70	295			
46540-15	46.5	40	58	189	70	295			
47040-15	47.0	40	58	193	70	300			
47540-15	47.5	40	58	193	70	300			
48040-15	48.0	40	58	197	70	304			
48540-15	48.5	40	58	197	70	304			
49040-15	49.0	40	58	201	70	308			
49540-15	49.5	40	58	201	70	308			
50040-15	50.0	40	58	205	70	312	SP□T180510-□□ XO□T180508-□□	FTNA0511	TW20-100
50540-15	50.5	40	58	205	70	312			
51040-18	51.0	40	68	210	70	320			
51540-18	51.5	40	68	210	70	320			
52040-18	52.0	40	68	214	70	324			
52540-18	52.5	40	68	214	70	324			
53040-18	53.0	40	68	218	70	328			
53540-18	53.5	40	68	218	70	328			
54040-18	54.0	40	68	222	70	332			
54540-18	54.5	40	68	222	70	332			
55040-18	55.0	40	68	226	70	336			
55540-18	55.5	40	68	226	70	336			
56040-18	56.0	40	68	230	70	342			
56540-18	56.5	40	68	230	70	342			
57040-18	57.0	40	68	235	70	347			
57540-18	57.5	40	68	235	70	347			
58040-18	58.0	40	68	240	70	352			
58540-18	58.5	40	68	240	70	352			
59040-18	59.0	40	68	245	70	357			
59540-18	59.5	40	68	245	70	357			
60040-18	60.0	40	68	250	70	362			
60540-18	60.5	40	68	250	70	362			

Applicable inserts G04~05



King Drill (4D)

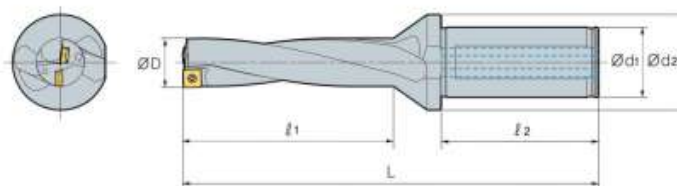

(mm)

Designation	ØD	Ød ₁	Ød ₂	l ₁	l ₂	L	Insert	Screw	Wrench
K4D									
36040-13	36.0	40	48	148	70	248	SP□T130410-□□ XO□T130406-□□	FTKA0410	TW15S
36540-13	36.5	40	48	148	70	248			
37040-13	37.0	40	48	152	70	252			
37540-13	37.5	40	48	152	70	252			
38040-13	38.0	40	48	156	70	257			
38540-13	38.5	40	48	156	70	257			
39040-13	39.0	40	48	160	70	261			
39540-13	39.5	40	48	160	70	261			
40040-13	40.0	40	48	164	70	266			
40540-13	40.5	40	48	164	70	266			
41040-13	41.0	40	48	168	70	270			
41540-13	41.5	40	48	168	70	270			
42040-13	42.0	40	48	172	70	275			
42540-13	42.5	40	48	172	70	275			
43040-15	43.0	40	58	177	70	282	SP□T15M510-□□ XO□T15M508-□□	FTNC04511	TW20S
43540-15	43.5	40	58	177	70	282			
44040-15	44.0	40	58	181	70	286			
44540-15	44.5	40	58	181	70	286			
45040-15	45.0	40	58	185	70	291			
45540-15	45.5	40	58	185	70	291			
46040-15	46.0	40	58	189	70	295			
46540-15	46.5	40	58	189	70	295			
47040-15	47.0	40	58	193	70	300			
47540-15	47.5	40	58	193	70	300			
48040-15	48.0	40	58	197	70	304			
48540-15	48.5	40	58	197	70	304			
49040-15	49.0	40	58	201	70	308			
49540-15	49.5	40	58	201	70	308			
50040-15	50.0	40	58	205	70	312	SP□T180510-□□ XO□T180508-□□	FTNA0511	TW20-100
50540-15	50.5	40	58	205	70	312			
51040-18	51.0	40	68	210	70	320			
51540-18	51.5	40	68	210	70	320			
52040-18	52.0	40	68	214	70	324			
52540-18	52.5	40	68	214	70	324			
53040-18	53.0	40	68	218	70	328			
53540-18	53.5	40	68	218	70	328			
54040-18	54.0	40	68	222	70	332			
54540-18	54.5	40	68	222	70	332			
55040-18	55.0	40	68	226	70	336			
55540-18	55.5	40	68	226	70	336			
56040-18	56.0	40	68	230	70	342			
56540-18	56.5	40	68	230	70	342			
57040-18	57.0	40	68	235	70	347			
57540-18	57.5	40	68	235	70	347			
58040-18	58.0	40	68	240	70	352			
58540-18	58.5	40	68	240	70	352			
59040-18	59.0	40	68	245	70	357			
59540-18	59.5	40	68	245	70	357			
60040-18	60.0	40	68	250	70	362			
60540-18	60.5	40	68	250	70	362			

Applicable inserts G04~05

