


RM4PS4000

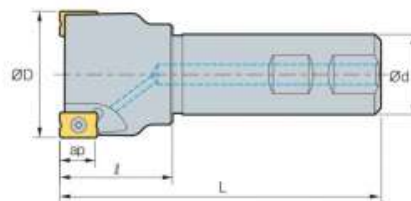

• AR: -6°
• RR: -24°~ -14°

(mm)

Designation		ØD	Ød	ℓ	L	ap	kg
RM4PS	4032HR-S32	2	32	32	40	125	0.68
	4032HR-S32M	3	32	32	40	125	0.69
	4040HR-S32	3	40	32	42	125	0.83
	4040HR-S32M	4	40	32	42	125	0.83
	4040HR-S40	3	40	40	42	125	1.14
	4040HR-S42	3	40	42	42	125	1.23
	4050HR-S32	3	50	32	45	125	1.02
	4050HR-S32M	4	50	32	45	125	1.02
	4050HR-S40	3	50	40	45	125	1.35
	4050HR-S40M	4	50	40	45	125	1.34
	4050HR-S42	3	50	42	45	125	1.45
	4050HR-S42M	4	50	42	45	125	1.45
	4063HR-S32	4	63	32	45	125	1.25
	4063HR-S32M	6	63	32	45	125	1.24
	4063HR-S40	4	63	40	45	125	1.62
	4063HR-S40M	6	63	40	45	125	1.61
	4063HR-S42	4	63	42	45	125	1.71
	4063HR-S42M	6	63	42	45	125	1.7

Available inserts

LNEX-MA

LNME(X)-MF

LNME(X)-MM



Designation		Cermet		Coated												Uncoated			page
		CN2000	CN30	NCM325	NC5330	NCM535	NCM545	PC2505	PC2010	PC3600	PC3700	PC6510	PC9530	PC9540	PC5300	PC5400	ST30A	G10	
LNEX	151004PNR-MF											●			●	●			
	151004PNR-MM										●				●	●			
	151004PNR-MA																	●	
	151008PNR-MF										●				●	●			
	151008PNR-MM									●	●				●	●			
	151008PNR-MA																	●	
	151016PNR-MF											●			●	●			
151016PNR-MM											●			●	●				
LNMX	151004PNR-MF								●	●	●				●	●			
	151004PNR-MM								●		●					●			
	151008PNR-MF					●			●	●	●				●	●			
	151008PNR-MM					●			●	●	●	●			●	●			
	151016PNR-MF								●		●				●	●			
	151016PNR-MM								●		●					●			

Parts

Specification	Screw	Wrench
Ø32-Ø63	FTKA0412B	TW15S

Available inserts E11

