



DEAD CENTER : CARBIDE TIPPED


CARBIDE FULL

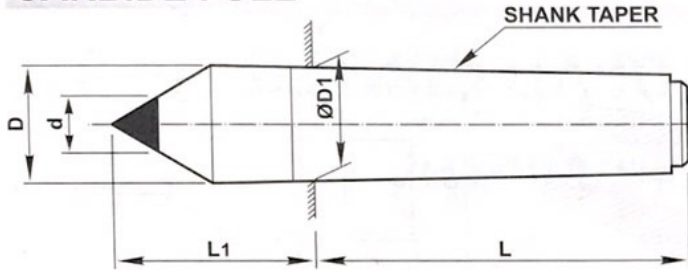


CARBIDE HALF

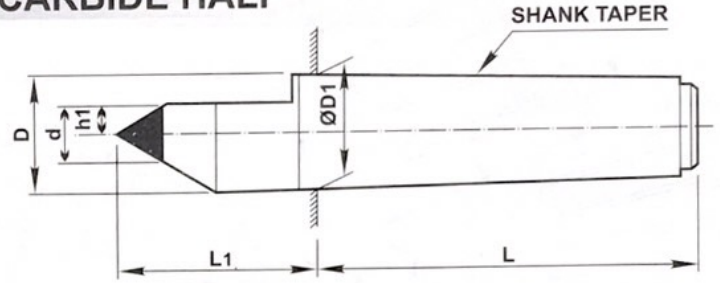


WITH FULL 60° ANGLE AS CARBIDE

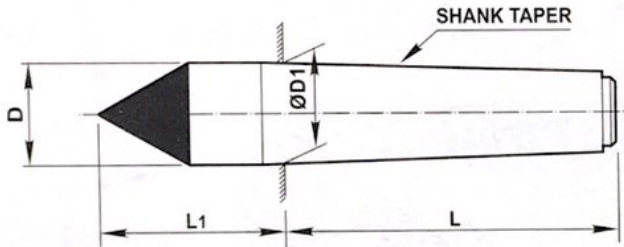

SPECIAL DEAD CENTER WITH EXTRA LARGE TIP

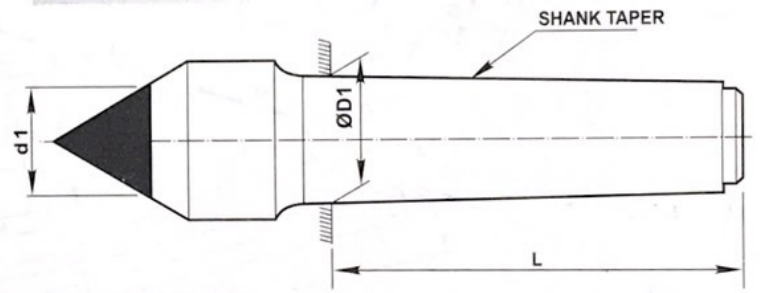

BULL NOSE TYPE

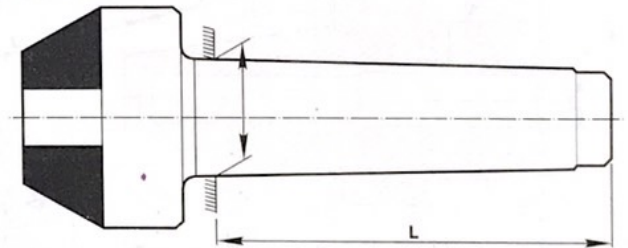

(Specification against request)

- # Tungsten Carbide Tips brazed in front for high wear resistance.
- # Shank made of Alloy Steel appropriately toughened.
- # Precision ground. Tip runout within 0.015 mm. w.r.t. Taper.
- # Standard point Angle 60°.
- # Broadly confirms to IS : 2534 - 1963 (Equivalent to DIN : 806-807).

SHANK TAPER	L mm	L1 mm	Ø D mm	D1 mm	Ø d mm C. T.	Ø d1 mm	h1 mm
MT - 1	53.5	26.5	12.2	12.065	5	-	3.15
MT - 2	64.0	36.0	18.0	17.780	8	-	5.50
MT - 3	81.0	44.0	24.1	23.825	11	AD - 14, 18, 22, 25 28, 30, 33, 40	7.00
MT - 4	102.5	57.5	31.6	31.267	14	AD - 18, 22, 25, 28 30, 33, 40	8.70
MT - 5	129.5	70.5	44.7	44.399	18	AD - 22, 25, 28, 30, 33, 40	10.70
MT - 6	182.0	88.0	63.8	63.348	18	AD - 22, 25, 28, 30, 33, 40	11.10

ORDER BY : SHANK TAPER X CARBIDE TIP DIAMETER Ød or Ød1 eg. : Dead Center Carbide Tipped MT-3 Tip Dia 11mm
Dead Center Carbide Tipped MT-3 Tip Dia 18mm