


King Drill (5D)

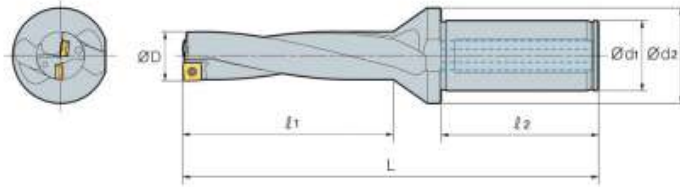


(mm)

Designation		ØD	Ød ₁	Ød ₂	l ₁	l ₂	L	Insert	Screw 	Wrench 
K5D	12020-04	12.0	20	25	63	50	127	SP□T040204-□□ XO□T040204-□□	FTNA0204	TW06P
	12520-04	12.5	20	25	63	50	127			
	13020-04	13.0	20	25	68	50	132			
	13520-04	13.5	20	25	68	50	132			
	14020-05	14.0	20	25	73	50	138	SP□T050204-□□ XO□T050204-□□	FTNA0204	TW06P
	14520-05	14.5	20	25	73	50	138			
	15020-05	15.0	20	25	78	50	144			
	15520-05	15.5	20	25	78	50	144			
	16020-05	16.0	20	25	83	50	149	SP□T060205-□□ XO□T060204-□□	FTKA02206S	TW07P
	16525-06	16.5	25	34	83	56	155			
	17025-06	17.0	25	34	88	56	160			
	17525-06	17.5	25	34	88	56	160			
	18025-06	18.0	25	34	93	56	166	SP□T07T208-□□ XO□T07T205-□□	FTKA02565	TW07S
	18525-06	18.5	25	34	93	56	166			
	19025-06	19.0	25	34	98	56	171			
	19525-06	19.5	25	34	98	56	171			
	20025-07	20.0	25	34	103	56	178	SP□T090308-□□ XO□T090305-□□	FTKA0307	TW09S
	20525-07	20.5	25	34	103	56	178			
	21025-07	21.0	25	34	108	56	183			
	21525-07	21.5	25	34	108	56	183			
	22025-07	22.0	25	34	113	56	188	SP□T11T308-□□ XO□T11T306-□□	FTKA03508	TW15S
	22525-07	22.5	25	34	113	56	188			
	23025-07	23.0	25	34	118	56	195			
	23525-07	23.5	25	34	118	56	195			
	24032-09	24.0	32	44	123	60	205	SP□T11T308-□□ XO□T11T306-□□	FTKA03508	TW15S
	24532-09	24.5	32	44	123	60	205			
	25032-09	25.0	32	44	128	60	210			
	25532-09	25.5	32	44	128	60	210			
	26032-09	26.0	32	44	133	60	215	SP□T11T308-□□ XO□T11T306-□□	FTKA03508	TW15S
	26532-09	26.5	32	44	133	60	215			
	27032-09	27.0	32	44	138	60	221			
	27532-09	27.5	32	44	138	60	221			
	28032-09	28.0	32	44	143	60	227	SP□T11T308-□□ XO□T11T306-□□	FTKA03508	TW15S
	28532-09	28.5	32	44	143	60	227			
	29032-09	29.0	32	44	148	60	232			
	29532-09	29.5	32	44	148	60	232			
	30032-11	30.0	32	44	153	60	240	SP□T11T308-□□ XO□T11T306-□□	FTKA03508	TW15S
	30532-11	30.5	32	44	153	60	240			
	31032-11	31.0	32	44	158	60	245			
	31532-11	31.5	32	44	158	60	245			
	32032-11	32.0	32	44	163	60	250	SP□T11T308-□□ XO□T11T306-□□	FTKA03508	TW15S
	32532-11	32.5	32	44	163	60	250			
	33032-11	33.0	32	44	168	60	256			
	33532-11	33.5	32	44	168	60	256			
	34032-11	34.0	32	44	173	60	261	SP□T11T308-□□ XO□T11T306-□□	FTKA03508	TW15S
	34532-11	34.5	32	44	173	60	261			
	35032-11	35.0	32	44	178	60	266			
	35532-11	35.5	32	44	178	60	266			

Applicable inserts G04~05

King Drill (5D)

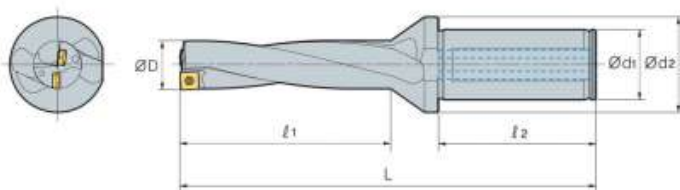

(mm)

Designation		OD	Od ₁	Od ₂	l ₁	l ₂	L	Insert	Screw	Wrench
K5D	36040-13	36.0	40	48	184	70	284	SP□T130410-□□ XO□T130406-□□	FTKA0410	TW15S
	36540-13	36.5	40	48	184	70	284			
	37040-13	37.0	40	48	189	70	289			
	37540-13	37.5	40	48	189	70	289			
	38040-13	38.0	40	48	194	70	295			
	38540-13	38.5	40	48	194	70	295			
	39040-13	39.0	40	48	199	70	300			
	39540-13	39.5	40	48	199	70	300			
	40040-13	40.0	40	48	204	70	306			
	40540-13	40.5	40	48	204	70	306			
	41040-13	41.0	40	48	209	70	311			
	41540-13	41.5	40	48	209	70	311			
	42040-13	42.0	40	48	214	70	317			
	42540-13	42.5	40	48	214	70	317			
	43040-15	43.0	40	58	220	70	325	SP□T15M510-□□ XO□T15M508-□□	FTNC04511	TW20S
	43540-15	43.5	40	58	221	70	326			
	44040-15	44.0	40	58	225	70	330			
	44540-15	44.5	40	58	225	70	330			
	45040-15	45.0	40	58	230	70	336			
	45540-15	45.5	40	58	230	70	336			
	46040-15	46.0	40	58	235	70	341			
	46540-15	46.5	40	58	235	70	341			
	47040-15	47.0	40	58	240	70	347			
	47540-15	47.5	40	58	240	70	347			
	48040-15	48.0	40	58	245	70	352			
	48540-15	48.5	40	58	245	70	352			
	49040-15	49.0	40	58	250	70	357			
	49540-15	49.5	40	58	250	70	357			
	50040-15	50.0	40	58	255	70	362			
	50540-15	50.5	40	58	255	70	362			
	51040-18	51.0	40	68	261	70	371	SP□T180510-□□ XO□T180508-□□	FTNA0511	TW20-100
	51540-18	51.5	40	68	261	70	371			
	52040-18	52.0	40	68	266	70	376			
	52540-18	52.5	40	68	266	70	376			
	53040-18	53.0	40	68	271	70	381			
	53540-18	53.5	40	68	271	70	381			
	54040-18	54.0	40	68	276	70	386			
	54540-18	54.5	40	68	276	70	386			
	55040-18	55.0	40	68	281	70	391			
	55540-18	55.5	40	68	281	70	391			
	56040-18	56.0	40	68	286	70	398			
	56540-18	56.5	40	68	286	70	398			
	57040-18	57.0	40	68	292	70	404			
	57540-18	57.5	40	68	292	70	404			
	58040-18	58.0	40	68	298	70	410			
	58540-18	58.5	40	68	298	70	410			
	59040-18	59.0	40	68	304	70	416			
	59540-18	59.5	40	68	304	70	416			
	60040-18	60.0	40	68	310	70	422			
	60540-18	60.5	40	68	310	70	422			

Applicable inserts G04~05

