

C MGT Holder



MGEVR/L

For grooving, turning, profil machining



MGMN
MRMN

MGGN
MRGN

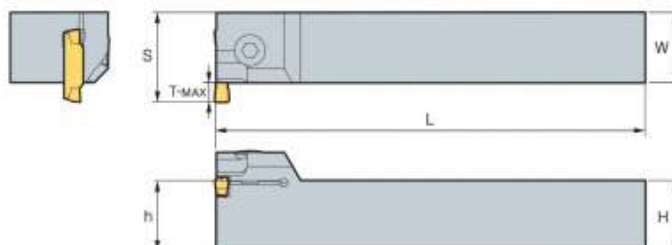

• R type insert

(mm)

Designation	H = (h)	W	L	S	T-MAX	Min. machining Dia. (ØD)	Inserts	Screw	Wrench
MGEVR/L	2020-1.5	20	20	125	23	3	85	MGMN150-G	LTX0514 TW20L
	2525-1.5	25	25	150	28	3	85		
	3232-1.5	32	32	170	35	3	85		
	2020-2	20	20	125	23.5	3.5	65	MGMN200-M MGMN200-G	
	2525-2	25	25	150	28.5	3.5	65		
	3232-2	32	32	170	35.5	3.5	65		
	2020-2.5	20	20	125	24	4	65	MGMN250-M MGMN250-G	
	2525-2.5	25	25	150	29	4	65		
	3232-2.5	32	32	170	36	4	65		
	2020-3	20	20	125	25.5	5	75	MGMN300-M/T MGGN300-□-M MRMN300-M MGMN300-□□-L/R	
	2525-3	25	25	150	30.5	5	75		
	3232-3	32	32	170	37.5	5	75		
	2020-4	20	20	125	25.5	5	70	MGMN400-M/T MGGN400-□□-M MRMN400-M MGMN400-□□-L/R	
	2525-4	25	25	150	30.5	5	70		
	3232-4	32	32	170	37.5	5	70		
	2020-5	20	20	125	27	7	75	MGMN500-M/T MGGN500-□□-M MRMN500-M MGMN500-□□-L/R	BHA0616 HW50L
	2525-5	25	25	150	32	7	75		
	3232-5	32	32	170	39	7	75		
	2020-6	20	20	125	27	7	70	MGMN600-M MGGN600-□□-M MRMN600-M	
	2525-6	25	25	150	32	7	70		
	3232-6	32	32	170	39	7	70		
	2525-8	25	25	150	34	9	50	MRMN800-M MGMN800-M	
	3232-8	32	32	170	41	9	50		
	2525-6A	25	25	150	32	7	70	MRGN600-A	
	3232-6A	32	32	170	39	7	70		
	2525-8A	25	25	150	34	9	45	MRGN800-A	
	3232-8A	32	32	170	41	9	45		

Applicable inserts C27~C29